

INFUSION METAL



FUSMA 101



FUSMB 101



FUSMM 101



FUSMJ 101



FUSMW 101



FUSMC 101

STANDARD SIZE	FUSMA 101	FUSMB 101	FUSMM 101	FUSMJ 101	FUSMW 101	FUSMC 101
Species	Victorian Ash	Blackwood	Myrtle	Jarrah	Walnut	Western Red Cedar
	\$	\$	\$	\$	\$	\$
Door 2040 x 820 x 40	2046	2440	2752	2715	2227	2577

SPECIAL SIZE	FUSMA 101	FUSMB 101	FUSMM 101	FUSMJ 101	FUSMW 101	FUSMC 101
Species	Victorian Ash	Blackwood	Myrtle	Jarrah	Walnut	Western Red Cedar
ADD TO STANDARD DOOR PRICE	\$	\$	\$	\$	\$	\$
Door 2040 x 920/870 x 40	+73	+73	+73	+73	+73	+73
Door 2340 x 820 x 40	+147	+147	+147	+147	+147	+147
Door Min 1990 x 790 x 40 – Max 2340 x 1020 x 40	+255	+255	+255	+255	+255	+255

SPECIFICATIONS

Door construction	Solid Particleboard core.
Veneer	Veneer is a natural product, as such the colour, grain and texture can vary. Whilst every attempt is made to ensure veneers match, any variation in colour, grain and texture will not be considered a defect. Solid timber 20mm edge strips applied to the stile is optional – price on application.
Trimming	Doors cannot be trimmed at the top or bottom due to the metal inlay. If a 20mm solid timber edge strip is applied to the stile of the door using pins, caution must be applied when trimming the door stiles (door width).
Hinges	Doors measuring up to 2040 x 920 require a minimum 3 hinges. Doors over and above this size require 4 hinges.
Metal inlays	Grade 304 brushed stainless steel metal inlay used. Metal inlay sits flush with the veneer surface. Metal inlays are applied to both sides of the door.
Pre-finishing & installation	If an edge strip is applied to the stiles, a minimum 50mm screw is required for securing the hinges to the door. Light reflective colours should be used on all doors exposed to direct sunlight. Finish doors with an oil based stain/sealer. Entrance doors must be installed in weather protected openings to reduce the effects of weather exposure. Refer to – Door Care and Maintenance recommendations. Failure to adhere to these recommendations will void warranty.
Approx. weight	50kg (Based on 2040 x 820 door).
Warranty	5 years – Terms and conditions apply – refer to Warranty and Terms and Conditions of Sale.
Special sizes	Prices and lead-times upon application. Special sizes will be Made to Order.
Made to Order (MTO)	All Infusion Metal doors including value added services applied to doors are Made to Order (MTO). MTO doors may only be cancelled on day of ordering. For further information contact Corinthian Customer Service.
Note	All prices exclude GST. All sizes are nominal and in millimetres. Door furniture pictured on the doors is sold separately. All doors depicted are professionally finished. Doors are supplied raw.

FEATURES

PROFILE	METAL INLAY
 <p>A cross-sectional diagram of a door profile. It shows three distinct layers. The outermost layer is labeled 'Skin'. The middle layer is a thick grey block labeled 'Core'. The innermost layer is a thin dark grey strip labeled 'Metal inlay'.</p>	 <p>A photograph showing a close-up of a door's edge. A dark, textured metal inlay strip runs vertically down the center, flanked by light-colored wood veneer on both sides.</p>
RAW VENEER	
<p>VICTORIAN ASH</p>  <p>A photograph of a wood grain sample with a light tan color and a straight, vertical grain pattern.</p>	<p>BLACKWOOD</p>  <p>A photograph of a wood grain sample with a medium brown color and a straight, vertical grain pattern.</p>
<p>MYRTLE</p>  <p>A photograph of a wood grain sample with a dark brown color and a wavy, irregular grain pattern.</p>	<p>JARRAH</p>  <p>A photograph of a wood grain sample with a dark brown color and a wavy, irregular grain pattern.</p>
<p>WALNUT</p>  <p>A photograph of a wood grain sample with a dark brown color and a wavy, irregular grain pattern, showing prominent knotting.</p>	<p>WESTERN RED CEDAR</p>  <p>A photograph of a wood grain sample with a light tan color and a straight, vertical grain pattern.</p>

INFUSION BLADE




BLADA3



BLADA4



BLADJ3

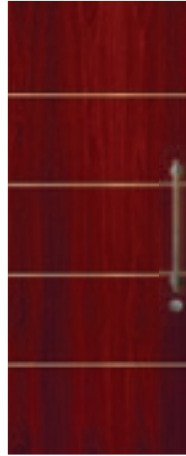

BLADJ4



BLADW3



BLADW4







STANDARD SIZE	BLADA3	BLADA4	BLADJ3	BLADJ4	BLADW3	BLADW4
Species	Victorian Ash	Victorian Ash	Jarrah	Jarrah	Western Red Cedar	Western Red Cedar
	\$	\$	\$	\$	\$	\$
Door 2040 x 820 x 40	3130	3490	3479	3839	3627	3988

SPECIAL SIZE	BLADA3	BLADA4	BLADJ3	BLADJ4	BLADW3	BLADW4
Species	Victorian Ash	Victorian Ash	Jarrah	Jarrah	Western Red Cedar	Western Red Cedar
ADD TO STANDARD DOOR PRICE	\$	\$	\$	\$	\$	\$
Door 2040 x 920/870 x 40	+73	+73	+73	+73	+73	+73
Door 2340 x 820 x 40	+147	+147	+147	+147	+147	+147
Door Min 1990 x 790 x 40 – Max 2340 x 1020 x 40	-	-	-	-	-	-

SPECIFICATIONS

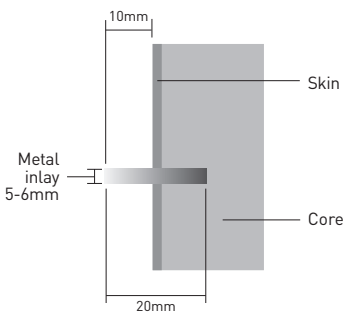Door construction	Solid Particleboard core.
Veneer	Veneer is a natural product, as such the colour, grain and texture can vary. Whilst every attempt is made to ensure veneers match, any variation in colour, grain and texture will not be considered a defect. Solid timber 20mm edge strips applied to the stile.
Trimming	Doors – 5mm from top and bottom. A 20mm solid timber edge strip is applied to the stiles using pins, therefore use caution when trimming the door stiles (door width).
Hinges	Doors measuring up to 2040 x 920 require a minimum 3 hinges. Doors over and above this size require 4 hinges.
Design note	Doors cannot be routed for trilocks or mortice locks.
Metal inlays	Grade 304 stainless steel metal inlays protrude 10mm from the door surface. The metal inlays do not extend to the edge of the door. Metal inlays are applied to both sides of the door.
Pre-finishing & installation	As an edge strip is applied to the stiles, a minimum 50mm screw is required for securing the hinges to the door. Light reflective colours should be used on all doors exposed to direct sunlight. Finish doors with an oil based stain/sealer. Entrance doors must be installed in weather protected openings to reduce the effects of weather exposure. Refer to – Door Care and Maintenance recommendations. Failure to adhere to these recommendations will void warranty.
Approx. weight	50kg (Based on 2040 x 820 door).
Warranty	5 years – Terms and conditions apply – refer to Warranty and Terms and Conditions of Sale.
Special sizes	Prices and lead-times upon application. Special sizes will be Made to Order.
Made to Order (MTO)	All Infusion Blade doors including value added services applied to doors are Made to Order (MTO). MTO doors may only be cancelled on day of ordering. For further information contact Corinthian Customer Service.
Note	All prices exclude GST. All sizes are nominal and in millimetres. Door furniture pictured on the doors is sold separately. All doors depicted are professionally finished. Doors are supplied raw.

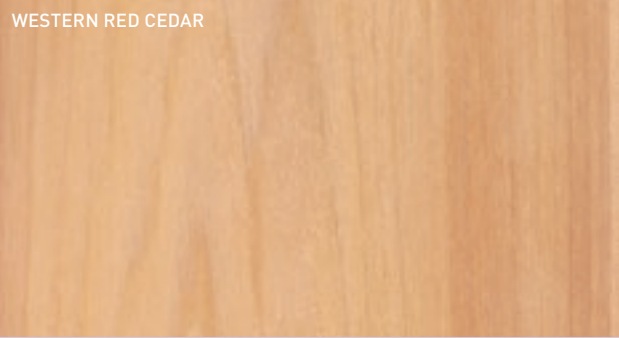FEATURES

PROFILE	RAW VENEER
 <p>A cross-sectional diagram of a door profile. It shows a vertical section with a top layer labeled 'Skin' that is 10mm thick. Below the skin is a 'Core' that is 20mm thick. A 'Metal inlay' is shown as a horizontal strip, 5-6mm thick, embedded in the skin. The total height of the profile is 30mm.</p>	<p>VICTORIAN ASH</p> 
<p>JARRAH</p> 	<p>WESTERN RED CEDAR</p> 
METAL INLAY	
	

INFUSION METAL



FUSMA PV 101



FUSMB PV 101



FUSMM PV 101



FUSMJ PV 101

	FUSMA PV 101	FUSMB PV 101	FUSMM PV 101	FUSMJ PV 101	FUSMW PV 101	FUSMC PV 101
Species	Victorian Ash	Blackwood	Myrtle	Jarrah	Walnut	Western Red Cedar
STANDARD SIZE	\$	\$	\$	\$	\$	\$
2040 x 1200 x 40	2227	2598	2901	3273	2386	2726
2340 x 1200 x 40	2322	2694	2996	3369	2482	2821

SPECIFICATIONS

Door construction	Solid Particleboard core
Veneer	Veneer is a natural product, as such the colour, grain and texture can vary. Whilst every attempt is made to ensure veneers match, any variation in colour, grain and texture will not be considered a defect. Solid timber 20mm edge strips applied to the stile is optional – price on application.
Trimming	Doors cannot be trimmed at the top or bottom due to the metal inlays. If a 20mm solid timber edge strip is applied to the stiles of the door using pins, caution must be applied when trimming the door stiles (door width).
Pivoting Wide Style doors	Infusion Metal wide style doors can be used within a Wide Style Pivot frame.
Hinging Wide Style doors	Infusion Metal wide style doors can be used within a Wide Style Hinged frame.
Cavity Sliding Wide Style doors	Infusion Metal wide style doors can be used within a Platinum 6000 Cavity door solution.
Metal inlays	Grade 304 brushed stainless steel metal inlays used. Metal inlay sits flush with the veneer surface. Metal inlays are applied to both sides of the door.
Pre-finishing & installation	Light reflective colours should be used on all doors exposed to direct sunlight. Finish doors with an oil based stain/sealer. Entrance doors must be installed in weather protected openings to reduce the effects of weather exposure. Refer to – Door Care and Maintenance recommendations. Failure to adhere to these recommendations will void warranty.
Approx. weight	50-60kg (Based on 2040 x 1200 door).
Warranty	5 years – Terms and conditions apply – refer to Warranty and Terms and Conditions of Sale.
Made to Order (MTO)	All Infusion Metal wide style doors including value added services applied to doors are Made to Order (MTO). MTO doors may only be cancelled on day of ordering. For further information contact Corinthian Customer Service.
Note	All prices exclude GST. All sizes are nominal and in millimetres. Door furniture pictured on the doors is sold separately. All doors depicted are professionally finished. Doors are supplied raw.



FUSMW PV 101



FUSMC PV 101


FEATURES

PROFILE	METAL INLAY
<p>Labels: Skin, Metal inlay, Core</p>	
RAW VENEER	
<p>VICTORIAN ASH</p>	<p>BLACKWOOD</p>
<p>MYRTLE</p>	<p>JARRAH</p>
<p>WALNUT</p>	<p>WESTERN RED CEDAR</p>


INFUSION BLADE



BLADA PV 3

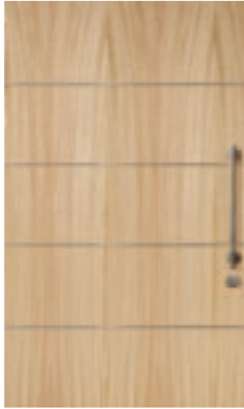

BLADA PV 4

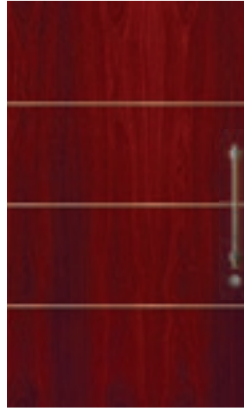

BLADJ PV 3




BLADJ PV 4


	BLADA PV 3	BLADA PV 4	BLADJ PV 3	BLADJ PV 4	BLADW PV 3	BLADW PV 4
Species	Victorian Ash	Victorian Ash	Jarrah	Jarrah	Western Red Cedar	Western Red Cedar
STANDARD SIZE	\$	\$	\$	\$	\$	\$
2040 x 1200 x 40	4083	4444	4630	4991	5300	5600
2340 x 1200 x 40	4349	4710	5001	5362	5650	5950

SPECIFICATIONS

Door construction	Solid Particleboard core
Veneer	Veneer is a natural product, as such the colour, grain and texture can vary. Whilst every attempt is made to ensure veneers match, any variation in colour, grain and texture will not be considered a defect. Solid timber 20mm edge strips applied to the stile.
Trimming	Doors – 5mm from top and bottom. A 20mm solid timber edge strip is applied to the stiles of the door using pins, therefore caution must be applied when trimming the door stiles (door width).
Pivoting Wide Style doors	Infusion Blade wide style doors can be used within a Wide Style Pivot frame.
Hinging Wide Style doors	Infusion Blade wide style doors can be used within a Wide Style Hinged frame.
Cavity Sliding Wide Style doors	Infusion Blade wide style doors can be used within a Platinum 6000 Cavity door solution.
Design note	Doors cannot be routed for trilock or mortice lock hardware.
Metal inlays	Grade 304 stainless steel metal inlays protrude 10mm from the door surface. The metal inlays do not extend to the edge of the door. Metal inlays are applied to both sides of the door.
Pre-finishing & installation	Light reflective colours should be used on all doors exposed to direct sunlight. Finish doors with an oil based stain/sealer. Entrance doors must be installed in weather protected openings to reduce the effects of weather exposure. Refer to – Door Care and Maintenance recommendations. Failure to adhere to these recommendations will void warranty.
Approx. weight	50-60kg (Based on 2040 x 1200 door).
Warranty	5 years – Terms and conditions apply – refer to Warranty and Terms and Conditions of Sale.
Made to Order (MTO)	All Infusion Blade wide style doors including value added services applied to doors are Made to Order (MTO). MTO doors may only be cancelled on day of ordering. For further information contact Corinthian Customer Service.
Note	All prices exclude GST. All sizes are nominal and in millimetres. Door furniture pictured on the doors is sold separately. All doors depicted are professionally finished. Doors are supplied raw.

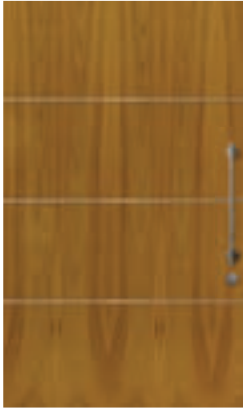

BLADW PV 3

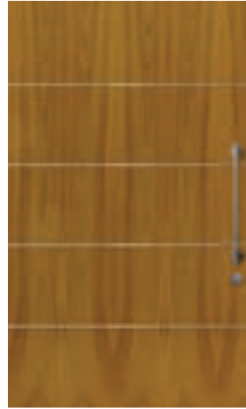

BLADW PV 4

FEATURES

PROFILE	RAW VENEER
	<p>VICTORIAN ASH</p>
<p>JARRAH</p>	<p>WESTERN RED CEDAR</p>
METAL INLAY	