

SLIMLITE



PSLM 201

PSLM 202

PSLM 204

PSLM 208

PRIMED – STANDARD SIZE

	PSLM 201	PSLM 202	PSLM 204	PSLM 208
UNGLAZED	\$	\$	\$	\$
Door 2040 x 820 x 40	478	569	515	627
GLAZED	\$	\$	\$	\$
Clear	610	710	652	855
Rice Paper	660	814	727	1008
Translucent	626	746	686	926

PRIMED – SPECIAL SIZE

	PSLM 201	PSLM 202	PSLM 204	PSLM 208
ADD TO STANDARD DOOR PRICE	\$	\$	\$	\$
Door 2040 x 920/870 x 40	+73	+73	+73	+73
Door 2340 x 820 x 40	+147	+147	+147	+147
Door Min 1990 x 520 x 40 – Max 2400 x 1020 x 40	+255	+255	+255	+255

VENEER – VERTICAL ROSEWOOD GRAIN

	VSLM 201	VSLM 202	VSLM 204	VSLM 208
ADD TO STANDARD DOOR PRICE	\$	\$	\$	\$
	+110	+110	+110	+110

VENEER – HORIZONTAL OAK GRAIN

	HSLM 201	HSLM 202	HSLM 204	HSLM 208
ADD TO STANDARD DOOR PRICE	\$	\$	\$	\$
	+200	+200	+200	+200

BAL 12.5 CONSTRUCTION

To order a BAL12.5 rated door, add "BAL12.5" to the end of the code. For example "PSLM 201 BAL12.5"

ADD TO STANDARD DOOR PRICE	\$	\$	\$	\$
	+55	+55	+55	+55

SPECIFICATIONS

Door material	Solid MDF core.
Skin	EXP External Primed skins, Veneered skins and BAL 12.5 Certified skins.
Rout profile	Square corner rout on both faces.
Trimming	Doors – 5mm from top and each stile, 25mm from bottom.
Glazing	Complies with AS1288:2006 for the selection and installation of glass in buildings. Glass pattern direction is oriented to longest length of glass opening or design direction.
Hinges	Doors measuring up to 2040 x 920 require a minimum 3 hinges. Doors over and above this size require 4 hinges.
Primed	Primed skin, excludes routing, door edges and glazing bead.
Pre-finishing & installation	Light reflective colours should be used on all doors exposed to direct sunlight. Entrance doors must be installed in weather protected openings to reduce the effects of weather exposure. Refer to – Door Care and Maintenance recommendations. Failure to adhere to these recommendations will void warranty.
BAL rating	BAL 12.5 – Must be specified at time of order.
Approx. weight	50kg (Based on 2040 x 820 door).
Warranty	5 years – Terms and conditions apply – refer to Warranty and Terms and Conditions of Sale.
Made to Order (MTO)	Made to Order (MTO) doors and sidelights may only be cancelled on day of ordering. In general, value added services applied to doors, glazed doors and sidelights are considered a MTO item. For further information contact Corinthian Customer Service.
Note	All prices exclude GST. All sizes are nominal and in millimetres. Door furniture pictured on the doors is sold separately. All doors depicted are professionally finished. Doors are supplied raw.

GLAZING OPTIONS



Rice Paper

Translucent

FEATURES

PROFILE	RAW VENEER		BAL RATING
<p>Glass</p> <p>Internal bead</p> <p>Skin</p> <p>Core</p>	<p>VERTICAL ROSEWOOD GRAIN</p>	<p>HORIZONTAL OAK GRAIN</p>	

MADISON AND SLIMLITE



PMAD PV 101



PMAD PV 104



PSLM PV 202




PSLM PV 208

PRIMED – STANDARD SIZE	PMAD PV 101	PMAD PV 104	PSLM PV 202	PSLM PV 208
UNGLAZED	\$	\$	\$	\$
2040 x 1200 x 40	927	978	1236	1339
2340 x 1200 x 40	1074	1125	1383	1486
GLAZED 2040 X 1200 X 40	\$	\$	\$	\$
Clear	1079	1160	1377	1606
Grey Translucent	-	-	-	-
Grey Tint	-	-	-	-
Rice Paper	-	-	-	-
Translucent	1109	1227	1413	1681
GLAZED 2340 X 1200 X 40	\$	\$	\$	\$
Clear	1226	1307	1524	1753
Grey Translucent	-	-	-	-
Grey Tint	-	-	-	-
Rice Paper	-	-	-	-
Translucent	1256	1374	1560	1828

SPECIFICATIONS

Door construction	Polypak Core
Skin	EXP External Primed skins and BAL 12.5 Certified skins.
Rout profile	Square corner rout on both faces.
Trimming	Doors – 5mm from top, bottom and each stile.
Glazing	Complies with AS1288:2006 for the selection and installation of glass in buildings. Glass pattern direction is oriented to longest length of glass opening or design direction.
Pivoting Wide Style doors	Madison and Slimlite wide style doors can be used within a Wide Style Pivot frame.
Hinging Wide Style doors	Madison and Slimlite wide style doors can be used within a Wide Style Hinged frame.
Cavity Sliding Wide Style doors	Madison and Slimlite wide style doors can be used within a Platinum 6000 Cavity door solution.
Primed	Primed skin, excludes routing, door edges and glazing bead.
Pre-finishing & installation	Light reflective colours should be used on all doors exposed to direct sunlight. Entrance doors must be installed in weather protected openings to reduce the effects of weather exposure. Refer to – Door Care and Maintenance recommendations. Failure to adhere to these recommendations will void warranty.
Approx. weight	75-80kg (Based on 2040 x 1200 door).
Warranty	5 years – Terms and conditions apply – refer to Warranty and Terms and Conditions of Sale.
Special sizes	Prices and lead-times upon application. Special sizes will be Made to Order.
Made to Order (MTO)	All Madison and Slimlite wide style doors are Made to Order (MTO). MTO doors may only be cancelled on day of ordering. In general, value added services applied to doors and glazed doors are considered a MTO item. For further information contact Corinthian Customer Service.
Note	All prices exclude GST. All sizes are nominal and in millimetres. Door furniture pictured on the doors is sold separately. All doors depicted are professionally finished. Doors are supplied raw.

GLAZING OPTIONS

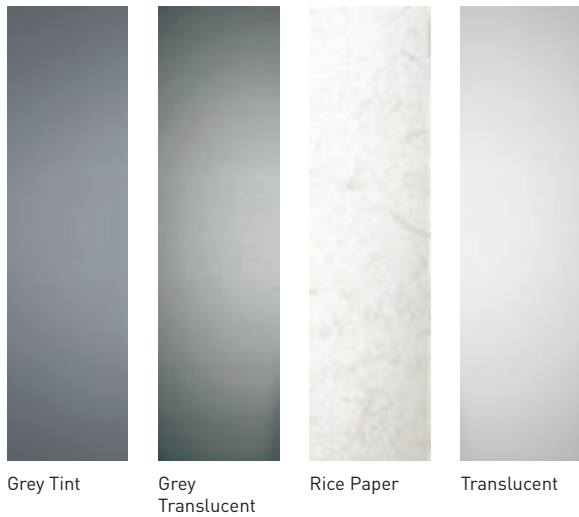

FEATURES

