

Introducing **e**co-friendly **e**ngineered Jarrah bench tops, stair treads, stringers, screening + posts

eJarrah

"the responsible design choice"

Introducing eco-friendly bench tops / stair treads, screening and posts. Engineered precision machined Jarrah which is guaranteed to give superior strength and stability.

bench tops

Available in two profiles:

Parquet 620 x 40mm - 1.8/2.4/3.0/4.2/5.4m
 Traditional 620 x 38mm - 1.8/2.4/3.0/3.6/5.4m
 & 930 x 38mm - 1.8/2.4/3.0/3.6

stair treads

Available in two profiles:

Parquet 310 x 40mm - 1.8/2.1/2.4/2.7/3.0/3.6m
 Stringer available 310 x 35mm - 2.4/3.6/5.4m
 Traditional (stair tread or stringer) 310 x 38mm -
 2.4/3.0/3.6/5.4

posts pre-oiled

Available: 120 x 120mm - 2.4/3.0/3.6/5.4m lengths
 Suitable for internal + external applications.

posts paint grade primed

Available: 120 x 120mm - 2.4/2.7/3.0/3.6 lengths
 Suitable for internal + external applications.

screening

Available: 63 x 20 - 2.7/3.6m lengths
 Suitable for internal + external applications.

eJarrah comes from independently certified, WA government managed, sustainable forests. Jarrah meets the rigorous demands of the Australian Forestry Standard.



Traditional



Parquet


Engineered - class A adhesion joint



Post



Parquet

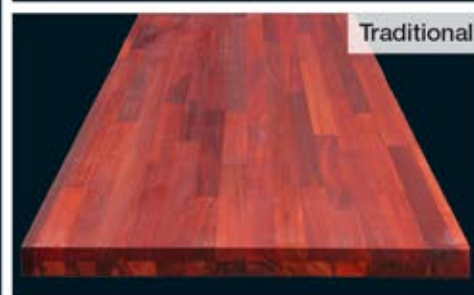

Traditional

Engineered - pre-oiled, solid jarrah posts guaranteed superior strength + stability
 *insitu images for illustration purpose only.

Maintenance

Just as with all timber used in external applications eposts will require additional coats of decking oil in the 1st year. Apply 3 additional coats within 12 month period. Thereafter, for optimum good looks + durability, regular applications of decking oil is required.

Tip: If the timber starts to look "dry" this is the time to re-oil.



BAYSWATER	144 Beechboro Road South	08 9272 2555
SUBIACO	HomeBase 55 Salvado Road	08 6380 6000
MANDURAH	25 Hampton Street	08 9583 8000
BUNBURY	50 McCombe Road	08 9724 8900
BUSSELTON	9 Trumper Drive	08 97527900
ALBANY	18 Merrifield Street	08 9844 5200
GERALDTON	315 Place Road	08 9960 5000

mbsales.net.au

M&B
 BUILDING PRODUCTS

Jarrah is back

sustainable quality timber products



ejarrah

engineered jarrah decking

"the responsible design choice." Introducing a new eco-friendly decking solution. eJarrah is an engineered, precision machined Jarrah decking which is guaranteed to give superior strength and stability. Both faces and sides of eJarrah come pre-oiled in "Machine Colour Guard" for optimum durability. Jarrah is a **premium** decking medium as well as being one of the hardest and most durable timbers known.

Sizes

available in 65 x 20mm (PR4E only), 85 x 20mm size boards. 3.6 or 4.5 metre set lengths.

Profile

available in the following profile:
PR4E – Pencil Round 4 Edges (dressed both faces).
Pre-grooved (both sides) option to suit secret fixing with Sola Clip.

Testing

independently tested at University of Western Australia School of Civil & Resource Engineering Testing Laboratory. NATA Certificate upon request.

Features & Benefits

- Pre-oiled
- Made by value adding wood shorts producing a premium product
- Class 2 durability
- Engineered - Class A adhesion join
- Max span 450mm
- Environmentally friendly - manufactured from quality sustainable timber; WA Government controlled
- Can be nailed, screwed or secret fixed
- KD to 12-14% MC (Moisture Content)

- ✓ eco-friendly
- ✓ pre-oiled
- ✓ maintains structural integrity
- ✓ engineered rating
- ✓ Sola Clip secret fixing available
- ✓ extremely durable
- ✓ sustainable timber
- ✓ superior strength
- ✓ consistent quality
- ✓ set length (minimal waste)



Preparation & Maintenance

eJarrah comes pre-oiled and will not require oiling prior to installation. A minimum ground clearance of 300mm is required. Ensure adequate ventilation and airflow - do not box in the deck with solid masonry structures. When laying the deck a minimum space of 5mm between boards is required. Just as with all timber decks, eJarrah will require additional coats of a high quality decking oil in the 1st year - M&B recommend Intergrain - Nature's Timber Oil. Apply 3 additional coats within 12 month period. Thereafter, for optimum good looks + durability, regular applications of decking oil is required. See the eJarrah Preparation & Maintenance Guide for more detailed information - available on the website www.mbsales.net.au.

