


# ENDURO A01/A08/A10 METAL DOOR SYSTEM

STRONG | QUICK INSTALLATION | PRE-HUNG

M&B's ENDURO DOOR SYSTEM is an all metal door & frame manufactured from high quality galvanised steel for optimum performance. The Enduro door and frame is fully powder coated. All doors come prehung and with an adjustable frame back opening - designed ready to be directly installed. The A01 and A08 have pre-drilled screw holes in the frame. The A10 has pre-drilled holes and plugs for hidden fixings, and is ideal for use in tilt-up panel walls for factory units, storage units, transportable homes, mining camps, commercial buildings of all types and the A08 is used in container conversions.



A01 ENDURO DOOR (As shown)

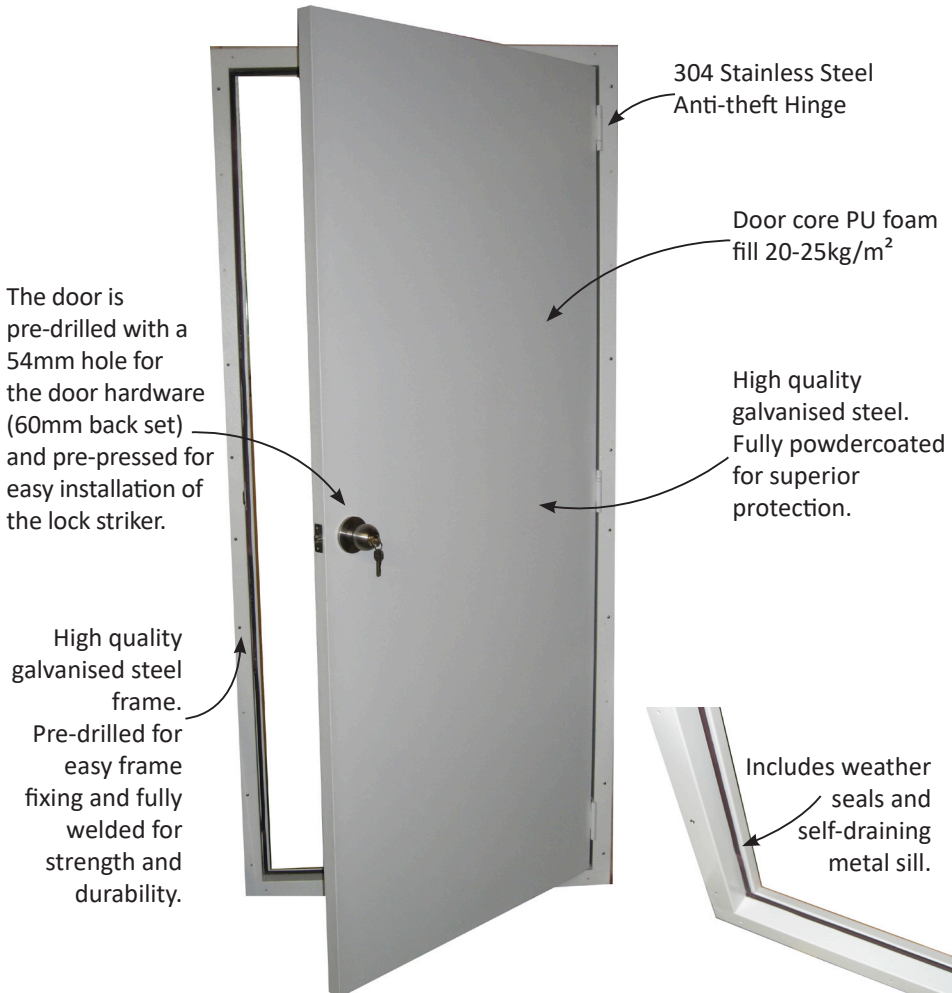


## FEATURES

- Galvanised steel frame and door
- Three 304 stainless steel anti-theft hinges
- Fully powder coated\*
- Pre-drilled for door hardware
- A01 and A10 takes any standard hardware with a 60mm backset
- A08 takes a square flush lock
- Pre-pressed frame to take striker plate

\*Stock colours of Shale grey for A01 & A10, Surf Mist for A08. (Other colours available. subject to minimum order quantity).

## FRAME OPENINGS & OVERALL DIMENSIONS

Minimum wall openings required for A01/A08/A10

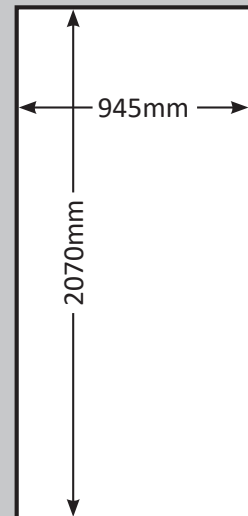

**Door Leaf 2040mm x 920mm**

Int Frame (W) 1035mm O/A

Ext Frame (W) 1023mm O/A

Ext Frame (H) 2137mm O/A

**NOTE:** Sizes are correct at time of printing. However some sizes may vary slightly at time of production.



A01 ENDURO DOOR	A08 ENDURO DOOR	A10 ENDURO DOOR
<b>Hardware:</b> Any standard hardware can be used.	<b>Hardware:</b> Square Flush Lock R3 Push to close latch (R3-10-311-10)	<b>Hardware:</b> Any standard hardware can be used, in addition the CARBCDL7100 digital lock can also be used.
<b>Back Opening:</b> 75-110mm	<b>Back Opening:</b> 75-110mm	<b>Back Opening:</b> 112-150mm
<b>Applications:</b> Suitable for use in dongas, transportable and steel stud frame construction.	<b>Applications:</b> Suitable for container conversions.	<b>Applications:</b> Suitable for use in tilt up panel construction.
<b>Stock Colour Available:</b> Shale Grey*	<b>Stock Colour Available:</b> Surf Mist*	<b>Stock Colour Available:</b> Shale Grey*

\* Other colours available (subject to minimum order quantity).

## FEATURES & BENEFITS

### COST SAVING

- Prehung system: less onsite labour costs.
- Door and frame fully powdercoated.
- The door frame has 40 pre-drilled holes for screws (A01 & A08). A10 has pre-drilled holes and plugs for hidden fixings.

### MANUFACTURED

- Door leaf – 0.7mm high quality galvanised steel fully welded envelope.
- Door frame – 1.5mm high quality galvanised steel.

### POWDERCOATED

- Electrostatic Shale Grey\* powder coated stipple finish (65 – 85um). All material is dipped in a phosphate acid bath prior to powdercoating. Door & frame are fully wrapped in plastic film for superior protection.

### MULTI FUNCTIONAL

- Fully reversible left & right hand application.

### ENERGY EFFICIENT

- PU foam fill 20-25kg/m<sup>2</sup> density for superior strength & energy efficiency.

### STRENGTH

- The door features an LVL exterior glue bond internal frame to provide additional strength.
- All hinge attachments are strengthened by the addition of a 3mm steel plate behind all hinge fixings.

### SEAL

- High quality black rubber seal fitted to external frame for protection from wind, noise, water & dust.

### TIMBER BLOCKING

- 300mm x 145mm Solid timber LVL timber fixing blocks to top & bottom of doors to allow for installation of door closer.
- 300 x 130mm LVL lock block to allow for fitting of door hardware.

### LOCK HOLE

- Fully paint sealed lock block to reduce water ingress
- Pre-drilled 54mm diameter hole to suit standard hardware
- Latch hole pre-drilled 25mm to take 60mm latch

### HINGES

- 3 x 304 stainless steel hinges with powder coated finish to match door colour.\*

### RECESSED LATCH/STRIKER PLATE

- Both latch & striker plates recessed into door and frame with pre-drilled holes for screws. This ensures a neat flush finish.

### WARRANTY

- 12 month manufacturers warranty.

### DOOR OPTIONS

- Available in standard: 2040 x 920 x 40mm

### AUSTRALIAN STANDARDS

- The standard Enduro door has been tested to Australian Standard AS1170.2 2002 for impact testing (region D).

\* Other colours available (subject to minimum order quantity)

[info@mbsales.net.au](mailto:info@mbsales.net.au)

BAYSWATER 144 Beechboro Road South [08] 9272 2555

Osborne Park  
426 Scarborough Beach Road  
[08] 6380 6000

BUNBURY  
50 McCombe Road  
[08] 9724 8900

ALBANY  
18 Merrifield Street  
[08] 9844 5200

MANDURAH  
25 Hampton Street  
[08] 9583 8000

BUSSELTON  
9 Trumper Drive  
[08] 9752 7900

GERALDTON  
315 Place Road  
[08] 9960 5000

[mbsales.net.au](http://mbsales.net.au)



**BUILDING PRODUCTS**